



### Teknik Özellikler Specifications

<b>Ana Gövde</b>	Elektrostatik toz boyalı alüminyum gövde
<b>Chassis</b>	Aluminium body with electrostatic powder coated
<b>Difüzör</b>	PC Opal difüzör
<b>Diffuser</b>	PC Opal diffuser
<b>LED &amp; Trafo</b>	Samsung, Osram, Tridonic, Philips, MeanWell, Eaglerise vb.
<b>LED &amp; Driver</b>	Samsung, Osram, Tridonic, Philips, MeanWell, Eaglerise etc.
<b>Opsiyon</b>	Akıllı sistemler (DALI-DIM) ve acil kit
<b>Option</b>	Intelligent systems (DALI-DIM) and emergency kits

### Ölçüler Dimensions (mm)

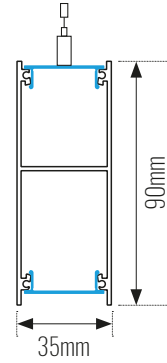

### Işık Açısı Light Beam



2700K-3000K-4000K-6500K, 220-240VAC-50/60Hz, MacAdam 3, CRI>80

Uzunluk Length (mm)	TOPLAM / TOTAL			DİREKT / DIRECT			ENDİREKT / INDIRECT		
	Güç Power (W)	Işık Gücü Lumen (lm)	Verimlilik Efficiency (lm/W)	Güç Power (W)	Işık Gücü Lumen (lm)	Verimlilik Efficiency (lm/W)	Güç Power (W)	Işık Gücü Lumen (lm)	Verimlilik Efficiency (lm/W)
620	18W	1833	104	13W	1323	105	5W	510	100
1020	30W	3055	104	21W	2205	105	9W	850	100
1220	35W	3666	104	25W	2646	105	10W	1020	100
1520	44W	4583	104	32W	3308	105	12W	1275	100
1820	53W	5499	104	38W	3969	105	15W	1530	100
2020	59W	6110	104	42W	4410	105	17W	1700	100
2420	71W	7332	104	50W	5292	105	21W	2040	100
3020	89W	9165	104	63W	6615	105	26W	2550	100

Lümen değerleri 4000K ışık sıcaklığı için verilmiştir. Teknik değerler, LED ve ekipmanların gelişimine bağlı olarak değişebilir. Lumen values are given for 4000K light temperature. Technical values may change depending on the development of LED and equipment.